

# Transfer Pumps-3 in. Polypropylene

## Series 1543P, 9243P and 9343P



Achieve the highest performance available in a 3" poly transfer pump (up to 484 GPM / 1832 LPM) with the highest efficiency and horsepower on the market. Ideal for nurse tank transfer and other closed system applications. The polypropylene housing and EPDM elastomers protect the pump from most chemicals and corrosive environments.

- Gas engine mount, pedestal mount or hydraulic drive options available
- Gas engine-driven versions powered by field proven 13 HP Hypro PowerPro engine or Honda GX390 (EPA & CARB certified)
- Housing: 3" X 3" Polypropylene
- Pump Seals: EPDM Mechanical
- Suction lift: 25 ft./7.62 m
- Poly impeller with stainless steel insert

### Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfg. & HP
1543P-130SP	440	1666	54	3.7	3" x 3" NPT	PowerPro 13 HP
1543P-130ESP	440	1666	54	3.7	3" x 3" NPT	PowerPro 13 HP w/ elec. start
1543P-130ESP-01	440	1666	54	3.7	300 x 300 UF	PowerPro 13 HP w/ elec. start
1543P-390EHSP	440	1666	54	3.7	3" x 3" NPT	Honda® GX390 w/ elec. start
9243P-SP	460	1741	54	3.7	3" x 3" NPT	Pedestal
9343P-GM6-SP	450	1703	52	3.6	3" x 3" NPT	Hydraulic
9343P-GM6Y-SP*	450	1703	52	3.6	3" x 3" NPT	Hydraulic
9343P-GM10-SP	484	1832	58	4.0	3" x 3" NPT	Hydraulic
9343P-GM10Y-SP*	484	1832	58	4.0	3" x 3" NPT	Hydraulic
3430-0692	Pump head kit with EPDM seal					
3430-0757	EDPM seal kit					
3410-0042	Cam lock kit					

\* Y= case drain motor

### 1543P-130SP, 1543P-130ESP, 1543P-390EHSP, 1543P-130ESP-01 U.S. Units

GPM at 0 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 58 PSI
440	400	338	269	184	68	0

### 1543P-130SP, 1543P-130ESP, 1543P-390EHSP, 1543P-130ESP-01 Metric Units

LPM at 0 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.0 BAR
1666	1514	1279	1018	697	257	0

### 9243P-SP

#### U.S. Units

	Feet PSI	0	12	23	35	46	58	69	81	92	104	116
2900 RPM	GPM	380	358	342	312	275	224	160	50	-	-	-
	HP	7.1	6.8	6.5	6.3	6.0	5.6	5.0	4.2	-	-	-
3200 RPM	GPM	424	405	384	359	331	297	251	193	103	0	-
	HP	9.1	8.9	8.7	8.5	8.3	8.0	7.5	7.0	6.2	5.3	-
3500 RPM	GPM	460	445	425	404	379	353	321	280	227	159	70
	HP	12.2	11.8	11.4	11.1	10.9	10.6	10.2	9.8	9.2	8.5	7.5

### 9243P-SP

#### Metric Units

	m BAR	5.1	10.2	12.8	15.3	17.9	20.4	23.0	25.5	28.1	30.6	33.2	35.7
2900 LPM	LPM	1325	1193	1097	980	830	637	376	46	-	-	-	-
	kW	5.0	4.7	4.6	4.4	4.1	3.8	3.4	2.9	-	-	-	-
3200 LPM	LPM	1497	1378	1301	1215	1118	996	853	660	403	154	-	-
	kW	6.6	6.4	6.3	6.1	6.0	5.7	5.5	5.2	4.7	4.3	-	-
3500 LPM	LPM	1650	1537	1471	1403	1328	1242	1139	1016	866	685	467	208
	kW	8.7	8.3	8.2	8.0	7.9	7.7	7.5	7.2	6.9	6.5	6.0	5.5

### 9343P-GM6-SP

#### US Units

Performance	Feet PSI	0	12	23	35	46	58	69	81	92	104	116	127
8 gal/min	GPM	342	316	284	240	176	67	-	-	-	-	-	-
9 gal/min	GPM	378	355	327	294	252	194	103	-	-	-	-	-
10 gal/min	GPM	414	394	371	345	314	276	227	155	52	-	-	-
11 gal/min	GPM	450	433	414	392	368	340	307	265	210	128	28	-

### 9343P-GM6-SP

#### Metric Units

Performance	m BAR	5.1	10.2	12.8	15.3	17.9	20.4	23.0	25.5	28.1	30.6	33.2	35.7
30 l/min	LPM	1110	885	730	495	145	-165	-	-	-	-	-	-
35 l/min	LPM	1335	1180	1085	970	825	630	345	35	-	-	-	-
40 l/min	LPM	1545	1425	1355	1270	1185	1080	960	805	600	325	45	-

### 9343P-GM10-SP

#### US Units

Performance	Feet PSI	0	12	23	35	46	58	69	81	92	104	116	127
12 gal/min	GPM	364	340	310	274	227	157	46	-	-	-	-	-
13 gal/min	GPM	391	368	342	312	275	227	158	55	-	-	-	-
14 gal/min	GPM	415	395	373	348	318	282	236	170	74	-	-	-
15 gal/min	GPM	445	426	406	383	357	327	292	247	187	102	7	-
16 gal/min	GPM	484	466	446	425	401	374	344	309	266	211	139	47

### 9343P-GM10-SP

#### Metric Units

Performance	m BAR	5.1	10.2	12.8	15.3	17.9	20.4	23.0	25.5	28.1	30.6	33.2	35.7
45 l/min	LPM	1225	1045	925	775	560	250	43	-	-	-	-	-
50 l/min	LPM	1390	1240	1150	1045	920	760	540	255	-24	-	-	-
55 l/min	LPM	1535	1405	1335	1255	1165	1060	935	780	575	310	35	-
60 l/min	LPM	1730	1610	1540	1470	1390	1305	1215	1105	985	840	665	445

Honda® is a registered trademark of Honda Motor Co., Ltd.  
Hypro is a registered trademark of Pentair.

# Gas Engine-Driven Transfer Pumps – 2 in. & 3 in. Cast Iron

## Series 1530



1532C-6SP with PowerPro Engine

- Gas engine driven (EPA & CARB certified)
- Pump seals: fluoroelastomer (viton)
- Suction lift: 20 ft. (6 m)
- Flapper valve: EPDM

### Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfg. & HP
1532C-6SP	170	644	42	2.9	2" x 2" NPT	PowerPro 6.5 hp
1532C-160HSP	170	644	42	2.9	2" x 2" NPT	Honda GX160
1533C-13SP	330	1249	60	4.1	3" x 3" NPT	PowerPro 13 hp
1533C-13ESP	330	1249	60	4.1	3" x 3" NPT	PowerPro 13 hp w/ electric start
1533C-390EHSP	330	1249	60	4.1	3" x 3" NPT	Honda GX390 w/ electric start
3430-0673CSP	170	644	42	2.9	Pump head kit for 2" NPT self-priming cast iron transfer pump	
3430-0674CSP	330	1249	60	4.1	Pump head kit for 3" NPT self-priming cast iron transfer pump	

### 1532C-6SP, 1532C-160HSP

#### U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 42 PSI
170	155	140	123	106	87	65	42	14	0

### 1532C-6SP, 1532-160HSP

#### Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 2.9 BAR
644	587	530	466	401	329	246	159	53	0

### 1533C-13SP, 1533C-13ESP, 1533C-390EHSP

#### U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 66 PSI
330	325	321	315	296	273	248	221	192	161	129	48	0

### 1533C-13SP, 1533C-13ESP, 1533C-390EHSP

#### Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.6 BAR
1249	1230	1215	1192	1120	1033	938	836	726	609	488	181	0

# Pedestal-Mount Transfer Pumps – 2 in. & 3 in. Cast Iron



3430-0674CSP



9232C-SP

### Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Description
9232C-SP	170	644	42	2.9	2" x 2" NPT self priming pedestal-mount cast iron transfer pump
9233C-SP	330	1249	60	4.1	3" x 3" NPT self priming pedestal-mount cast iron transfer pump
3430-0673CSP	170	644	42	2.9	Pump head kit for 2" NPT self-priming cast iron transfer pump
3430-0674CSP	330	1249	60	4.1	Pump head kit for 3" NPT self-priming cast iron transfer pump
3430-0675					Replacement pedestal for 2" NPT self-priming cast iron transfer pump
3430-0676					Replacement pedestal for 3" NPT self-priming cast iron transfer pump

### 9232C-SP, 3430-0673CSP

#### U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 42 PSI
170	155	140	123	106	87	65	42	14	0

### 9232C-SP, 3430-0673CSP

#### Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 2.9 BAR
644	587	530	466	401	329	246	159	53	0

### 9233C-SP, 3430-0674CSP

#### U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI	GPM at 60 PSI	GPM at 66 PSI
330	325	321	315	296	273	248	221	192	161	129	48	0

### 9233C-SP, 3430-0674CSP

#### Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR	LPM at 4.6 BAR
1249	1230	1215	1192	1120	1033	938	836	726	609	488	181	0

# Hydraulically-Driven Transfer Pumps – 2 in. Cast Iron



9332C-HM\_C-SP

- Housing: cast iron
- Pump seals: fluoroelastomer (viton)
- Suction lift: 20 ft. (6 m)
- Flapper valve: EPDM

## Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Hyd. Flow GPM	Hyd. Flow LPM	Port Size
9332C-HM1C-SP	170	644	60	4.1	13	49	2" x 2" NPT
9332C-HM5C-SP	170	644	60	4.1	16	60	2" x 2" NPT

## 9332C-HM1C-SP

### U.S. Units

Hyd. Flow GPM	GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI
8	150	138	124	88	53	0		
9	160	150	140	113	79	48	0	
10	170	163	155	135	108	77	42	0

## 9332C-HM1C-SP

### Metric Units

Hyd. Flow LPM	LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR
30	568	522	469	333	201	0		
34	606	567	530	428	229	182	0	
38	643	617	587	511	409	291	159	0

## 9332C-HM5C-SP

### U.S. Units

Hyd. Flow GPM	GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI
10	150	138	123	90	55	0		
11	160	150	140	113	79	48	0	
12	170	163	155	135	108	77	42	0

## 9332C-HM5C-SP

### Metric Units

Hyd. Flow LPM	LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR
38	568	522	466	341	208	0		
42	606	568	530	428	299	182	0	
45	644	617	587	511	409	291	158	0

# Electric Motor Mount Transfer Pumps – 2 in. & 3 in. Cast Iron



- Housing: cast iron
- Pump seals: fluoroelastomer (viton)
- Suction lift: 20 ft. (6 m)
- Flapper valve: EPDM

## Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	NEMA Frame
9732C-SPX*	170	644	42	2.9	2" x 2" NPT	182/184TC
9733C-SPX*	330	1249	60	4.1	3" x 3" NPT	215TC

\* Electric Motor not included

## 9732C-SPX

### U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI
170	151	133	113	94	74	52	25	0

## 9732C-SPX

### Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR
644	572	503	428	356	280	197	95	0

## 9733C-SPX

### U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI	GPM at 55 PSI	GPM at 60 PSI	GPM at 61 PSI
330	325	320	310	290	265	230	195	163	133	95	50	11	0

## 9733C-SPX

### Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR	LPM at 3.8 BAR	LPM at 4.1 BAR	LPM at 4.2 BAR
1249	1230	1211	1173	1098	1003	871	738	617	503	360	190	42	0

Viton® is a registered trademark of DuPont. Hypro® is a registered trademark of Pentair.

# Gas Engine-Driven Transfer Pumps – 2 in. Polypropylene

## Series 1542P



1542P-65SPM 6.5 HP with frame

- Gas engine driven (EPA & CARB certified-North America and EC/CE Listed -Europe)
- Pump Seals: EPDM Mechanical
- Suction lift: 25 ft./7.62 m
- Available with or without frame

### Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfr. & HP
1542P-65SP	200	757	58	4.0	2" x 2" NPT	PowerPro 6.5 hp
1542P-65SPM	200	757	58	4.0	2" x 2" NPT	PowerPro 6.5 hp with frame
1542P-65ESP	200	757	58	4.0	2" x 2" NPT	PowerPro 6.5 hp w/ elec. start
1442P-65SP	200	757	58	4.0	2" x 2" NPT	6.5 HP EC/CE listed
1542P-160HSP	200	757	58	4.0	2" x 2" NPT	Honda® GX160
1542P-200HSP	200	757	58	4.0	2" x 2" NPT	Honda® GX200
1542P-950BSP	200	757	58	4.0	2" x 2" NPT	Briggs & Stratton® 950
1542P-55SP	150	568	58	4.0	2" x 2" NPT	PowerPro 6.5 hp
1542P-550BSP	150	568	58	4.0	2" x 2" NPT	Briggs & Stratton® 550
3410-0041	Cam lock kit					
3430-0690	Pump head kit for 1542P-55SP with EPDM seal					
3430-0691	Pump head kit for 1542P-65SP with EPDM seal					
3430-0635	EPDM seal kit					
3430-0659	Viton seal kit					

### 1542P-55SP, 1542P-550BSP

GPM at 0 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 58 PSI
150	147	131	108	80	48	0

### U.S. Units

### 1542P-55SP, 1542P-550BSP

LPM at 0 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.0 BAR
568	556	496	409	303	182	0

### Metric Units

### 1542P-65SP, 1542P-200HSP, 1542P-950BSP

GPM at 0 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 58 PSI
200	182	162	136	106	65	0

### U.S. Units

### 1542P-65SP, 1542P-200HSP, 1542P-950BSP

LPM at 0 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.0 BAR
757	689	613	515	401	246	0

### Metric Units

# Hydraulically-Driven Transfer Pumps – 2 in. Polypropylene

## Series 9342P

9342P-HM\_C-5SP  
Hydraulic drive



### Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Motor Capacity
9342P-HM1C-5SP	200	757	58	4.0	2" x 2" NPT	10 gpm
9342P-HM5C-5SP	206	780	60	4.1	2" x 2" NPT	11 gpm
3430-0635	EPDM seal kit					

### 9342P-HM1C-5SP

Hyd. Flow GPM	GPM at 0 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 58 PSI
8	165	145	122	95	57		
9	185	166	144	119	86	0	
10	200	184	164	141	114	80	0

### U.S. Units

### 9342P-HM1C-5SP

Hyd. Flow LPM	LPM at 0 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.0 BAR
30.3	625	549	463	358	215		
34.1	700	630	547	449	325	0	
37.9	757	695	620	534	433	301	0

### Metric Units

### 9342P-HM5C-5SP

Hyd. Flow GPM	GPM at 0 PSI	GPM at 10 PSI	GPM at 20 PSI	GPM at 30 PSI	GPM at 40 PSI	GPM at 50 PSI	GPM at 60 PSI
9	175	154	123	84	0		
10	192	174	149	118	76	0	
11	206	189	169	145	117	79	0

### U.S. Units

### 9342P-HM5C-5SP

Hyd. Flow LPM	LPM at 0 BAR	LPM at 0.7 BAR	LPM at 1.4 BAR	LPM at 2.1 BAR	LPM at 2.8 BAR	LPM at 3.4 BAR	LPM at 4.1 BAR
34.1	662	582	467	316	0		
37.9	727	658	562	446	288	0	
41.6	780	717	639	550	442	299	0

### Metric Units

Honda® is a registered trademark of Honda Motor Co., Ltd.

Briggs & Stratton® is a registered trademark of Briggs & Stratton Corporation. Hypro® is a registered trademark of Pentair Ltd.

# Gas Engine-Driven Transfer Pumps – 2 in. & 3 in. Aluminum

## Series 1540A



1541A-SP



1543A-65TSP



1543A-65SP

- PowerPro Gas engine driven (EPA & CARB certified)
- Housing: Aluminum
- Pump seals: EPDM Mechanical
- Suction lift:
- 13 ft./4m (1541A)
- 23 ft./7.01m (1542A & 1543A)
- Trash pumps will handle 1-1/8" (29 mm) solids
- Transfer pumps will handle 3/8" (9.5mm) solids
- Framed: 1542A & 1543A versions only

### Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfr. & HP
1541A-SP	40	151	28	1.9	2" x 2" BSP	PowerPro 2.5 hp
1542A-65SP	147	556	50	3.4	2" x 2" NPT	PowerPro 6.5 hp
1542A-160HSP	147	556	50	3.4	2" x 2" NPT	Honda GX160
1542A-550BSP	147	556	50	3.4	2" x 2" NPT	Briggs & Stratton 550
1543A-65SP	259	980	50	3.4	3" x 3" NPT	PowerPro 6.5 hp
1543A-160HSP	259	980	50	3.4	3" x 3" NPT	Honda GX160
1543A-65TSP (Trash)	272	1030	50	3.4	3" x 3" NPT	PowerPro 6.5 hp
1543A-160HTSE	272	1030	50	3.4	3" x 3" NPT	Honda GX160
3430-0791	3" Trash Kit (NPT ports, SAE 3/4" keyed shaft mount)					
3430-0792	2" Transfer Kit (NPT ports, SAE 3/4" keyed shaft mount)					
3430-0793	3" Transfer Kit (NPT ports, SAE 3/4" keyed shaft mount)					

### 1541A-SP

U.S. Units					
GPM at 0 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 28 PSI
40	28	21	14	7	0

### 1541A-SP

Metric Units					
LPM at 0 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 1.9 BAR
151.4	106.0	79.5	53.0	26.5	0

### 1542A-65SP, 1542A-160HSP, 1542P-550BSP

### U.S. Units

GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI
147	144	136.6	124.7	110.2	94.1	78.3	57.1	19.2	0

### 1542A-65SP, 1542A-160HSP, 1542P-550BSP

### Metric Units

LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR
556.5	545.1	517.1	472	417.2	356.2	296.4	216.1	72.7	0

### 1543A-65SP, 1543A-160HSP

### U.S. Units

GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI
259	251.6	233.7	213.6	190.9	162.2	135.8	99.3	56.1	8.7

### 1543A-65SP, 1543A-160HSP

### Metric Units

LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR
980.4	952.4	884.6	808.6	722.6	614	514.1	375.9	212.4	32.9

### 1543A-65TSP, 1543A-160HTSE

### U.S. Units

GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI
272	269.8	241	207.6	179.3	140.4	98.1	50.7	5.4	0

### 1543A-65TSP, 1543A-160HTSE

### Metric Units

LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR
1029.6	1021.3	912.3	785.8	678.7	531.5	371.3	191.9	20.4	0


Honda® is a registered trademark of Honda Motor Co., Ltd.

Briggs & Stratton® is a registered trademark of Briggs & Stratton Corporation. Hypro® is a registered trademark of Pentair Ltd.



# Transfer Pumps – 2 in. & 3 in. Aluminum

## Series 1570

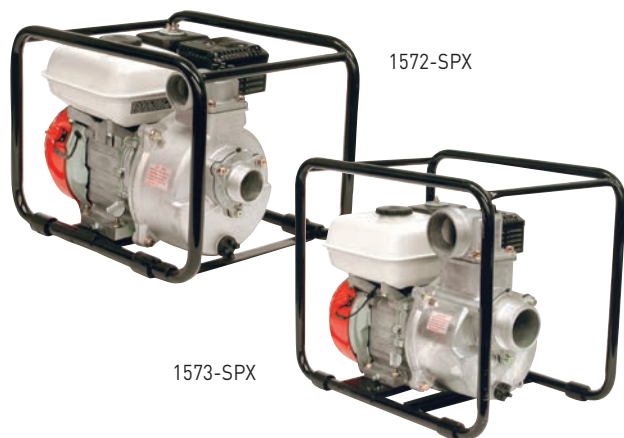

- Honda® engine (EPA & CARB certified)
- Close-coupled, gas engine driven
- Housing: Aluminum
- Pump seals: Buna-N/ceramic
- Inlet valve: Buna-N
- Suction lift: 28 ft./8.53m

### Order Information

Model Number	Max GPM	Max LPM	Max PSI	Max BAR	Port Size	Engine Mfrgr. & HP
1572-SPX	145	549	50	3.4	2" x 2" NPT	Honda® 4 hp
1573-SPX	280	1060	50	3.4	3" x 3" NPT	Honda® 5.5 hp

### 1572-SPX

### U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI
145	141	133	125	114	102	87	70	51	24	0

### 1572-SPX

### Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR
549	534	503	473	432	386	329	265	193	91	

### 1573-SPX

### U.S. Units

GPM at 0 PSI	GPM at 5 PSI	GPM at 10 PSI	GPM at 15 PSI	GPM at 20 PSI	GPM at 25 PSI	GPM at 30 PSI	GPM at 35 PSI	GPM at 40 PSI	GPM at 45 PSI	GPM at 50 PSI
280	268	255	233	211	181	149	115	77	46	0

### 1573-SPX

### Metric Units

LPM at 0.0 BAR	LPM at 0.3 BAR	LPM at 0.7 BAR	LPM at 1.0 BAR	LPM at 1.4 BAR	LPM at 1.7 BAR	LPM at 2.1 BAR	LPM at 2.4 BAR	LPM at 2.8 BAR	LPM at 3.1 BAR	LPM at 3.4 BAR
1060	1014	965	882	799	685	564	435	291	174	

# Transfer Pumps Accessories

## Transfer Pump Cam Lock Kit



Hypro cam lock kits easily add heavy-duty male cam lock connections to the NPT ports of 2" and 3" polypropylene pumps.

- Includes one male cam lock adapter for pump inlet
- Includes one heavy-duty 90° elbow and one male cam lock adapter for the pump outlet
- Prepares transfer pumps for the most common means of quick coupling a hose
- Interchangeable with other cam lock fittings made to MIL-C-27487 specifications

### Order Information

Size	Model Number
2" NPT	3410-0041
3" NPT	3410-0042

Honda® is a registered trademark of Honda Motor Co., Ltd.  
Hypro is a registered trademark of Pentair.